

CGRA4001 Thru CGRA4007

Glass Passivated Type

Reverse Voltage: 50 - 1000 Volts

Forward Current: 1.0 Amp



Features

Ideal for surface mount applications

Easy pick and place

Plastic package has Underwriters Lab. flammability classification 94V-0

Built-in strain relief

High surge current capability

Mechanical data


Case: JEDEC DO-214AC molded plastic

Terminals: solderable per MIL-STD-750, method 2026

Polarity: Color band denotes cathode end

Mounting position: Any

Approx. Weight: 0.063 gram

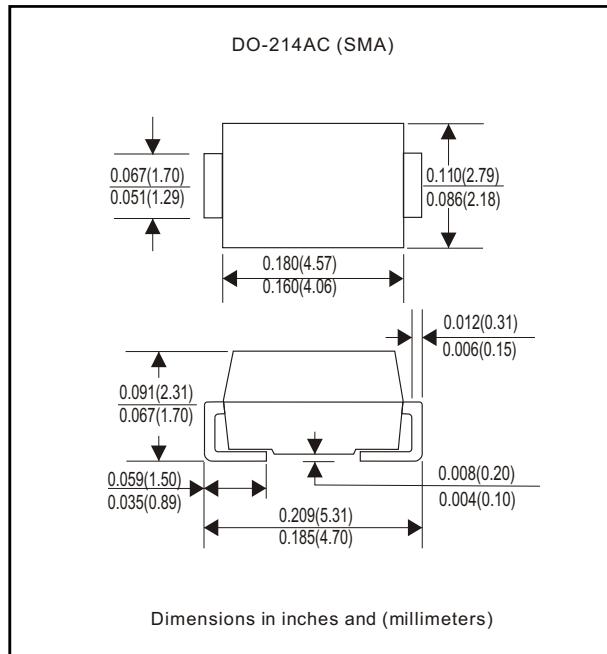

Maximum Ratings and Electrical Characteristics

| Parameter | Symbol | CGRA 4001 | CGRA 4002 | CGRA 4003 | CGRA 4004 | CGRA 4005 | CGRA 4006 | CGRA 4007 | Unit |
|---|------------------|-----------|-------------|-----------|-----------|-----------|-----------|-----------|------|
| Max. Repetitive Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Max. DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Max. RMS Voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rateload (JEDEC method) | I _{FSM} | | | | 30 | | | | A |
| Max. Average Forward Current | I _o | | | | 1.0 | | | | A |
| Max. Instantaneous Forward Current at 1.0 A | V _F | | | | 1.1 | | | | V |
| Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C Ta=100°C | I _R | | | | 5 50 | | | | μA |
| Max. Thermal Resistance (Note 1) | R _{θJA} | | 75 | | | 85 | | | °C/W |
| Operating Junction Temperature | T _j | | -55 to +150 | | | | | | °C |
| Storage Temperature | T _{STG} | | -55 to +150 | | | | | | °C |

Note 1: Thermal resistance from junction to ambient.

Rating and Characteristic Curves (CGRA4001 Thru CGRA4007)

Fig. 1 - Reverse Characteristics

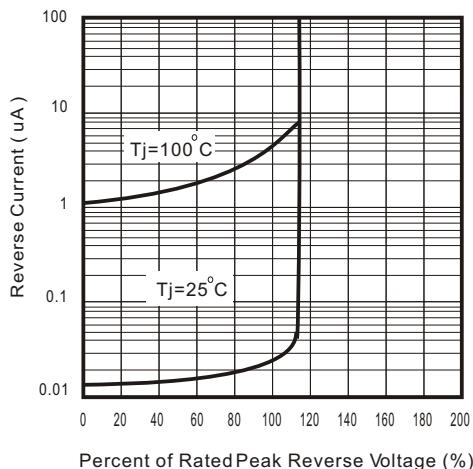


Fig.2 - Forward Characteristics

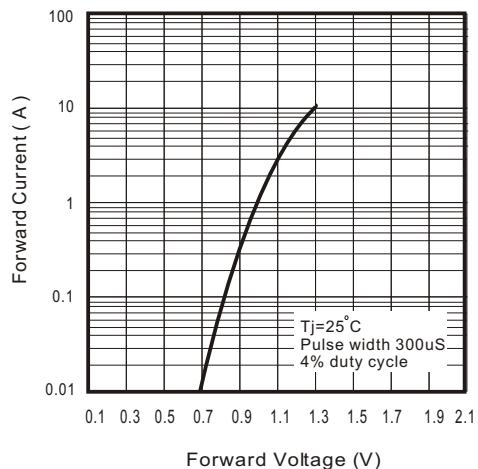


Fig. 3 - Junction Capacitance

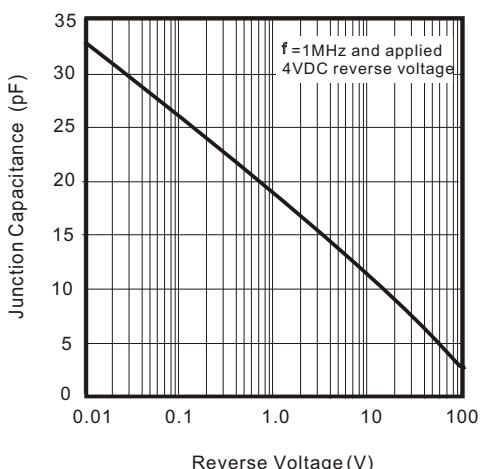


Fig. 4 - Current Derating Curve

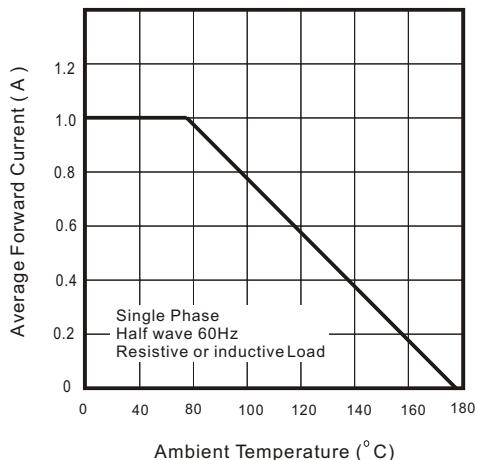


Fig. 5 - Non Repetitive Forward Surge Current

